

A photograph of a modern, two-story house at night. The house has a light-colored stucco exterior and a section with horizontal stone tiles. Warm, yellowish light from the 'ecolite' LED reflectors illuminates the building's facade, the windows, and the surrounding landscaping, including some bushes. The sky is a deep blue.

ecolite®

Innovación™
que ilumina

FICHA
TÉCNICA
REFLECTOR LED 3 CCT



ecolite®

Reflector LED 3CCT



Ref. FLO20WIP65



INFORMACIÓN DEL PRODUCTO

POTENCIA	20W
VOLTAJE FRECUENCIA	AC85-277V 50/60Hz
FACTOR DE POTENCIA	≥0.9
CLASE DE AISLAMIENTO	1
TEMP. DE COLOR	3CCT (6.500K/4.000K/3.000K)
TIPO DE LED	SMD2835
CANTIDAD DE CHIP/LED	24
DIMERIZABLE	No
IRC	80Ra
FLUJO LUMINOSO	2.000 Lm
EFICIENCIA LUMINOSA	100Lm/W
VIDA ÚTIL	50.000h
CHASIS	Aluminio
COLOR DE CHASIS	Gris
ÓPTICA	Lente de aumento en policarbonato IK08
ÁNGULO DE APERTURA	90°
GRADO DE PROTECCIÓN	IP66 IK08
TIPO DE MONTAJE	Sobreponer
TEMP. DE TRABAJO	-20°C + 40°C

ESQUEMA

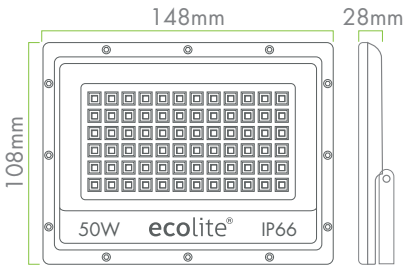

Cable Siliconado
VDE 3x1.0mm²

Conecte con
polo a tierra



Válvula
Anticondensación

Evita el empañamiento o
la condensación de agua

3 CCT Temperatura
de Color Seleccionable

3000K

4000K

6500K

Luz Cálida

Luz Neutra

Luz Blanca



Interruptor 3 CCT







Utilice el interruptor para
seleccionar entre las tres
temperaturas de color



Tapa
Protectora

Fabricada en silicona
para mayor hermeticidad
del interruptor 3CCT

FORMA DE INSTALACIÓN



Modo de montaje en la pared

Modo de montaje en pedestal

Modo de montaje en techo



ecolite®
www.ecolite.com.co